Installation Instructions

Model CB (Ritter) and CS (Midmark) Task Lights 18" and 36" Lengths

INSTALLATION

A. Remove light lens and light bulb.

NOTE
Discard the mounting instructions from Light Corp.

B. Slide the appropriate (right or left hand) mounting bracket assembly in position, inserting the tab into the slot on the back of the light. Repeat with other bracket.

C. Install front mounting screw and lockwasher.

D. Loosen two rear screws until adjustable plate can be easily moved.

E. Position front edge of mounting brackets on front, bottom lip of cabinet.
Swing the back of light upward into place adjusting the plates so they rest securely on back, bottom lip of cabinet.
Tighten screws on adjustable plates.

F. Install the light bulb and lens then plug light into an appropriate 115 VAC receptacle and check operation.

G. A 1/4" hole is provided in each mounting bracket for installation of cable ties to secure the power cord or leads.

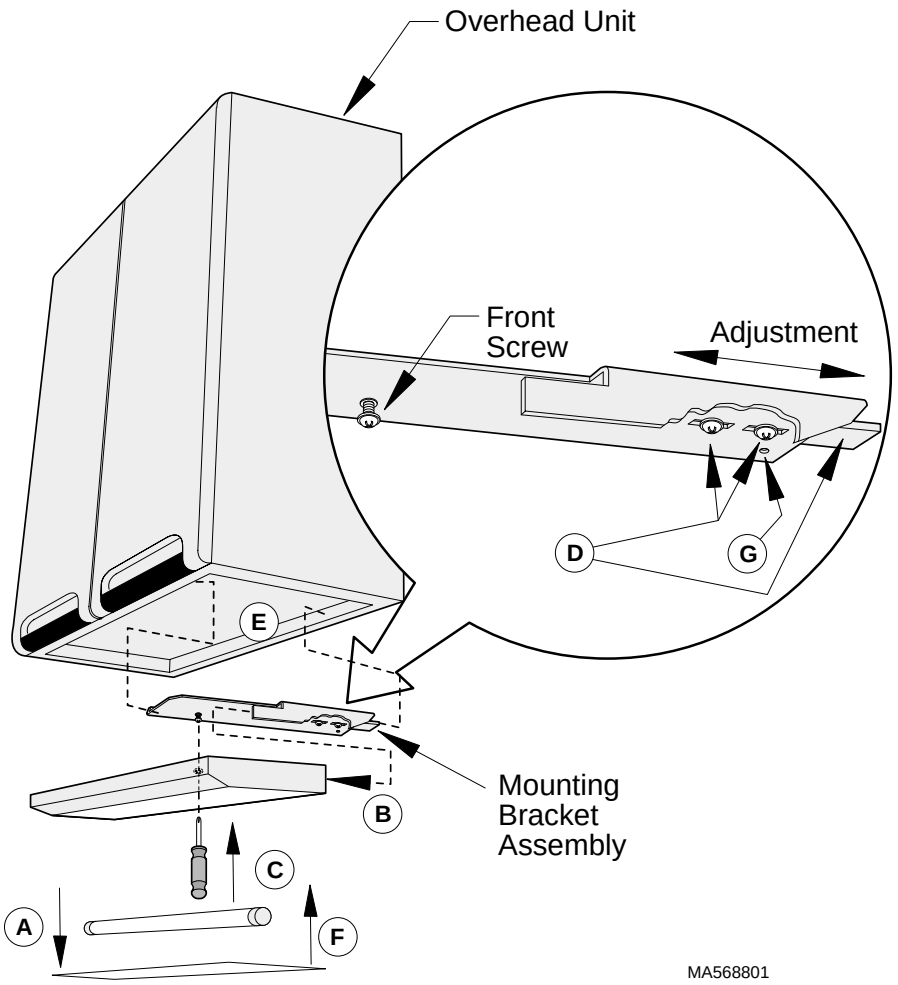

Hardwire Applications

Any hardwire applications require a licensed electrician to connect the three wires (hot, neutral, and ground) to the building electrical system following the applicable local codes.
A conduit hole is provide in the back of the light.

Daisy Chain Applications

The daisy chain option allows up to ten lights to be wired together using a single supply power source. Each fixture can be turned On or Off independently. The first light must be a DCP (daisy chain with power cord). The specifier must indicate whether a power cord (DCP) or jumper cord (DCJ) is required for additional fixtures.

MIDMARK®
Midmark Corporation, Versailles, Ohio 45380 U.S.A.
(937) 526-3662 FAX (937) 526-5542

003-1241-00 Rev. A (6/01)

© Midmark Corporation - 2001